



JDE®

Terrassenschrauben

Decking Screws




1

I-Stern und Fräsrippen / I-Star and self-countersinking ribs

Optimale Kraftübertragung, sauberes Versenken.
Optimal torque transmission and perfect self-countersinking.


www.jdplus.de

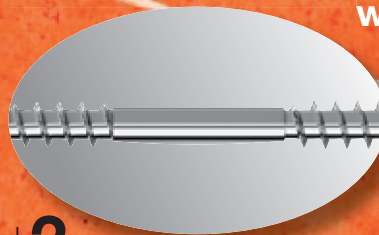

2

Fixiergewinde / Locking thread

Sicheres und enges Verbinden zweier Hölzer.
Secure fastening of both the deck and the frame.

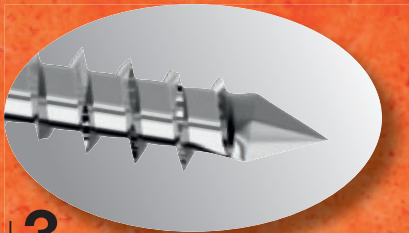

3

Die Spitze / The thread cutting tip

Schnelles Greifen im Holz, kein Spleißen.
Speedy insertion, no splitting.

Die ultimative Schraube zur Verarbeitung in Harthölzern. The ultimate timber decking screw.

Die neue **JD** Terrassenschraube bietet universelle Einsatzmöglichkeiten bei der täglichen Arbeit im Außenbereich. Eine saubere, rostfreie und professionelle Verarbeitung in Harthölzern wird unter anderem durch das Fixiergewinde erreicht, welches für eine sichere und enge Verbindung zwischen zwei Hölzern sorgt.

Der I-Stern sorgt für eine optimale Kraftübertragung, während die Spitze ein schnelles Greifen der Schraube im Holz garantiert. Durch den Einsatz dieses neuen, innovativen Produktes wird ein Spleißen des Holzes fast ausgeschlossen. Das Vorbohren wird jedoch empfohlen.

*For use in all decking applications. Made from A2 stainless steel makes the new **JD** ideal for all exterior environments and will not react with tanalised timber. The reverse locking thread underneath the head ensures both the deck and timber frame are securely fixed.*

The I-Star provides optimal torque transmission whilst the thread cutting razor sharp point ensures speedy insertion. The thread cutting prevents the wood from splitting. However predrilling is requested.


Terrassenschraube • Decking Screw

WGR 3699 • Senkkopf mit I-Stern und Fräsrippen, rostfrei, A2

- Countersunk with I-Star recess and self-countersinking ribs, stainless steel, A2

WGR 3034 • Senkkopf mit I-Stern und Fräsrippen, rostfrei, A4

- Countersunk with I-Star recess and self-countersinking ribs, stainless steel, A4

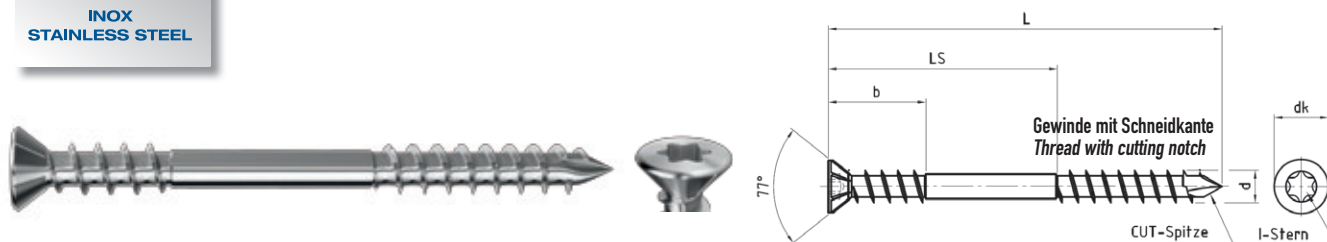

Abmessungen • Dimensions

Nennmaß Basic size	Gewinde-Ø Thread-Ø	Kopf-Ø Head-Ø	Gewindelänge Length of thread	I-Stern I-Star	Gesamtlänge Length	Schaftlänge Length of shaft
	d/mm	dk	b		L	LS
40	5,0	8,0	15,0	I-25	43,0	20,5
50	5,0	8,0	15,0	I-25	53,0	30,5
60	5,0	8,0	15,0	I-25	63,0	35,5
70	5,0	8,0	15,0	I-25	73,0	40,5
80	5,0	8,0	15,0	I-25	83,0	45,5

Gewinde-Ø Thread-Ø	Länge Length	Inhalt Content	Preis A2 Price A2	Preis A4 Price A4
d/mm	l/mm	Stück/Pieces	€/100 Stück/Pieces	€/100 Stück/Pieces
5,0	40	200	24,00	36,00
	50	200	29,00	44,00
	60	100	33,00	52,00
	70	100	49,00	73,00
	80	100	53,00	82,00